ThermoCraft™

Bringing Wood Science to Wood People

CLEAR HARDWOOD

Red Oak.

ThermoCraft™ Red Oak

Clear	6 to 12 ft	LDCwood	USA
OPEN GRAIN	LENGTHS	PRODUCER	ORIGIN

WHAT OUR TEAM KNOWS

We know where Red Oak fits.


Red Oak comes out of modification a dark brown. Left unfinished, it weathers to silver grey; moisture drives the change. Our team offers advice to you, your builders and your specifiers on grade, profiles, fasteners and coatings.

FOR YOUR BUSINESS

A clear-grade hardwood deck to specify, with our team to answer the questions and point your builder to a stocking dealer.

HOW WE SUPPLY IT

Milled ThermoCraft boards and profiles, made to our grade specs, in lengths and packs set to your program.

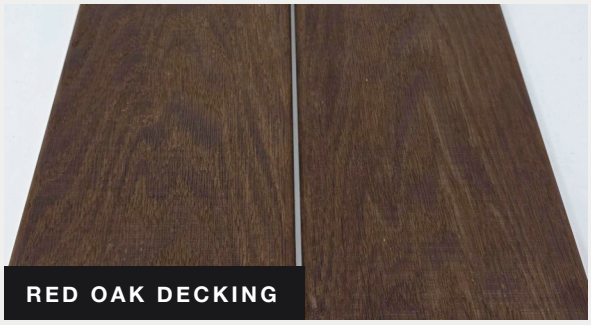

RED OAK DECKING

ARCHITECTS AND SPECIFIERS

Request ThermoCraft Red Oak samples.

Talk to our team. We point your builder to a stocking dealer.

+1 (778) 646-2810 | info@thermocraft.com | www.thermocraft.com

ThermoCraft™

MADE BY LDC WOOD THERMOWOOD®

SPECIFICATION

Red Oak, in detail.

SPECIES AND SUPPLY

BOTANICAL NAME	*Quercus rubra*
GRADE	Clear
ORIGIN	United States
PRODUCER	LDCwood
LENGTHS	6 to 12 ft
USES	Decking

PROFILES / NOMINAL INCHES



Decking — 1 x 6, end matched
Rounded edges

Sections are schematic. Confirm net sizes and stock with our team.

Custom profiles on request. Talk to our sales team.



RED OAK DECKING BOARDS

HOW TO SPECIFY

1. **Choose** the species and profile.
2. **Confirm** sizes and lengths with our team.
3. **Ask** for samples.
4. **Order** through your stocking dealer or us.

INSTALLATION AND CARE

- Face-screw with stainless steel screws, never nails.
- Leave a 1/4 in gap between 6 in boards.
- Seal cut ends when the boards are pre-finished, to hold the colour.
- End-matched boards: each board rests on and is fastened to at least two joists.
- A hidden-fastening plug system is available; ask our team.

COATINGS

ThermoCraft takes paints, oils (not linseed) and waxes. Follow the coating maker's guidance.

ThermoWood® is a registered trademark of the International ThermoWood Association.

+1 (778) 646-2810 | info@thermocraft.com | www.thermocraft.com